


REVISION			
REV	DATE	DESCRIPTION	APPRO.BY

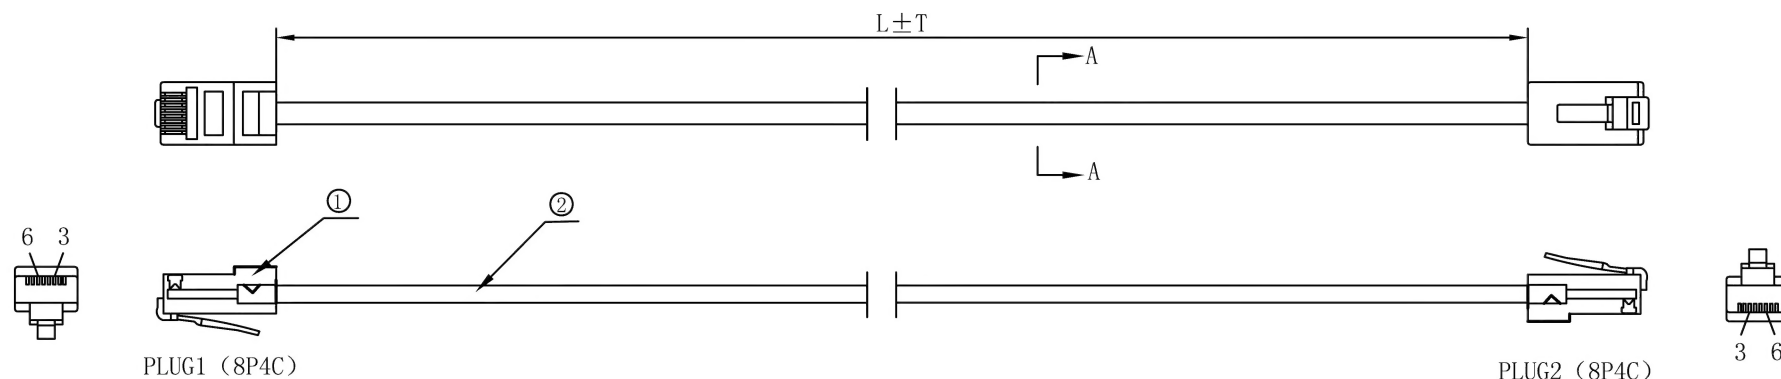


WIRING DIAGRAM

PLUG1 (8P4C) PLUG2 (8P4C)

3 WHITE 3
4 BROWN 4
5 GREEN 5
6 YELLOW 6

ITEM	LENGTH
K2408.050	500 ± 5MM
K2408.1	1000 ± 10MM
K2408.2	2000 ± 20MM
K2408.3	3000 ± 30MM
K2408.6	6000 ± 60MM
K2408.10	10000 ± 100MM





NOTE:

1. ROHS Compliant
2. KEEP CLEAN
3. Operating Temperature range : -15°C-80°C

2	CABLE	JACKET/PVC COLOR:BLACK OD:4.0mm(SOLID CORE) CONDUCTOR: 7*0.12CCA ;	1
1	CONNECTOR	8P4C (ROUND HOLE), GOLD PLATING 3U' ON CONTACTS, UL 94V-2	2
NO.	MAT.NAME	DESCRIPTION	Q'TY

CUSTOMER'S ITEM		K2408.X	CUSTOMER		EFB
DRAWING			TITLE		PATCH CORD
UNIT	mm	SCALE	1:1	REV	
DRAWN BY		CHECK BY		APPRO BY	DATE
					2012.12.06



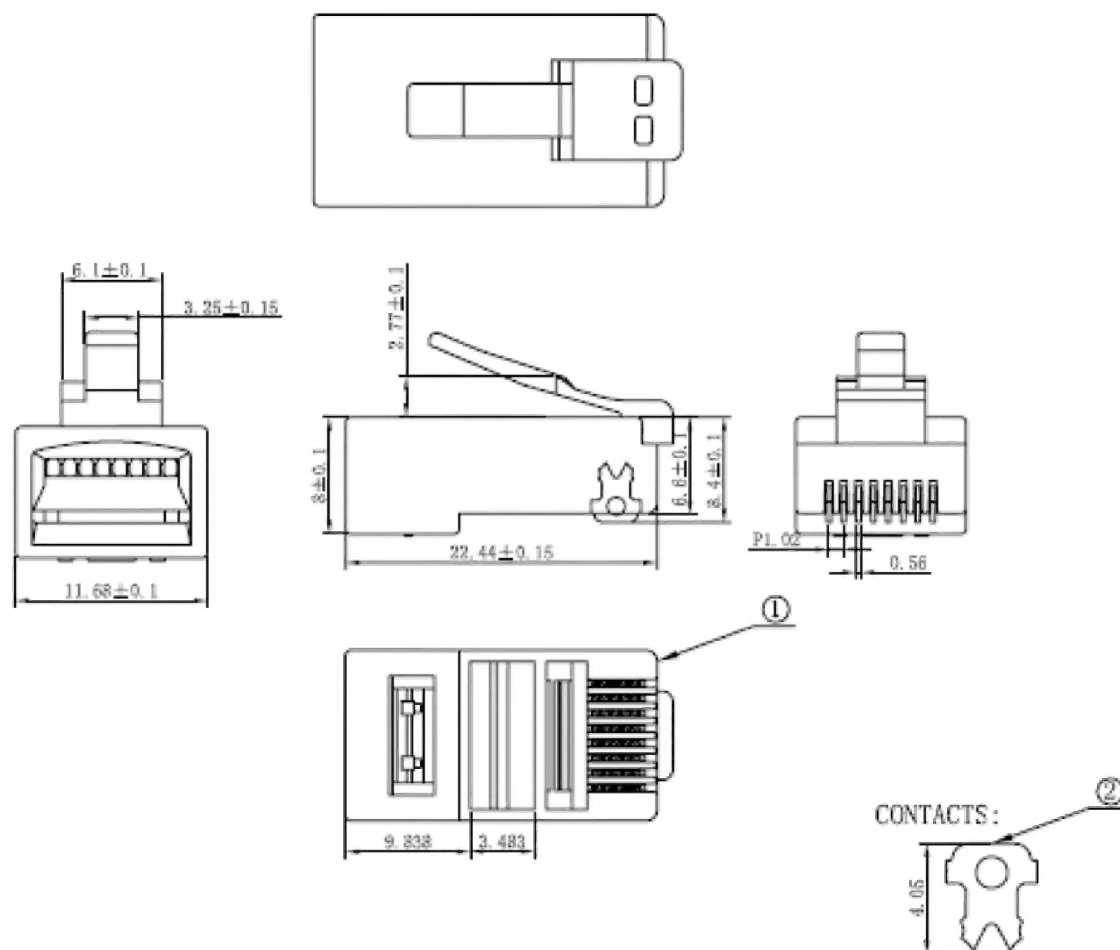

SPECIFICATION

1. ELECTRICAL

- (1). UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS
- (2). INSULATION RESISTANCE: 1000M Ω MIN
- (3). DIELECTRIC STRENGTH: 1000AC (50-60Hz) 1MINUTE
- (4). CONTACT RESISTANCE: 30m Ω MAX

2. MECHANICAL

- (1). CABLE TO PLUG TENSILE STRENGTH: 7.79Kg MIN
- (2). CRIMP TENSILE STRENGTH: 2.27Kg
- (3). DURABILITY: 750 CYCLES MIN

3. MATERIAL

- (1). HOUSING: PC (POLYCARBONATE) UL94V-2
COLOR: TRANSLUCENT PANTONE: 280C
- (2). CONTACTS: PHOSPHOR BRONZE
PLATE: Aperture: 1.0-1.05mm
- (3). GOLD PLATING: 3U"

MATERIAL LIST:

					CUSTOMER'S ITEM		CUSTOMER		EFB	
					DRAWING		TITLE		PATCH CORD	
②	CONTACT BLADE	PHOSPHOR BRONZE	8		UNIT	mm	SCALE	1:1	REV	
①	US PLUG	PLUG 8P4C(ROUND HOLE) PLATE GOLD 3U" COLOR: TRANSPARENT	1PCS		DRAWN BY		CHECK BY		APPRO BY	
NO	MAT. NAME	DESCRIPTION	QT' Y	REMARK					DATE	
									2012.12.6	

